




GNM 5440

DC Motors
with permanent magnet field

Motor series GNM 5440
up to 150 Watts output power
with + without parking brake

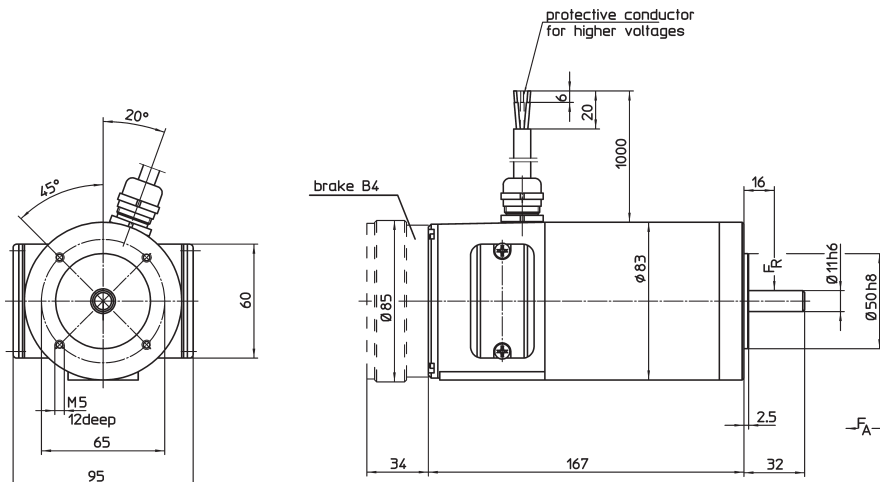


Operation characteristics:


n - Speed
 η - Efficiency

P_1 - Input power
 P_2 - Output power


GNM5440, 24V, 1600rpm

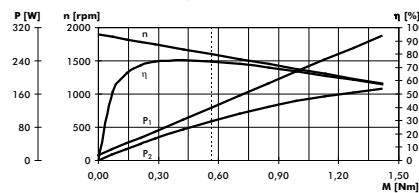


GNM5440, 24V, 3000rpm

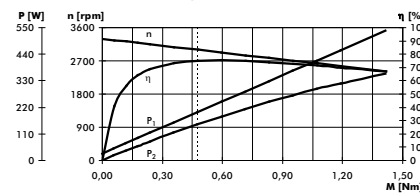


GNM5440, 42V, 3000rpm

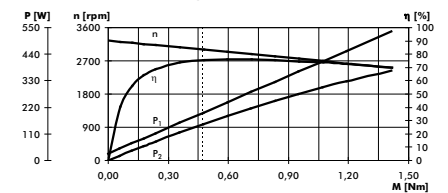

GNM5440, 180V, 1600rpm

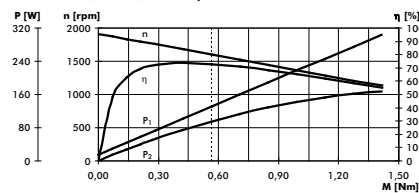


GNM5440, 180V, 3000rpm

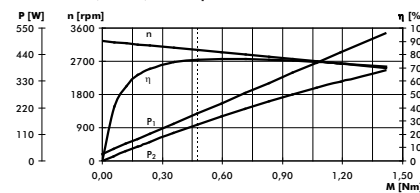


Control characteristics :

$n=f(M)$ - Speed as a torque function
 $n=f(U)$ - Speed as a supply voltage function


GNM5440, 24V, 1600rpm

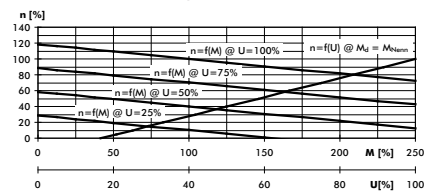


GNM5440, 24V, 3000rpm

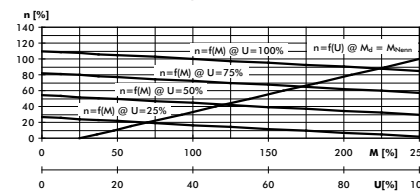


GNM5440, 42V, 3000rpm

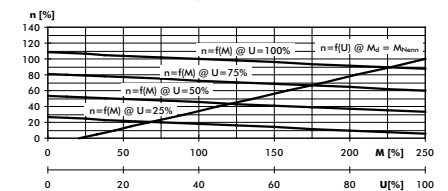

GNM5440, 180V, 1600rpm

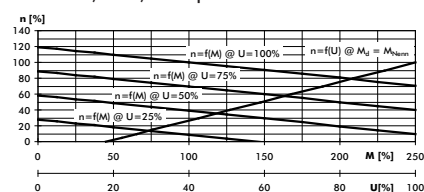

GNM5440, 180V, 3000rpm

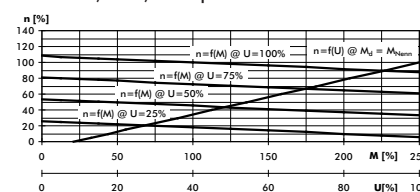

		GNM 5440				
		E				
type	series	1600	3000	3000	1600	3000
nominal speed	rpm	24	24	42	180	3000
nominal voltage	V	24	24	42	180	180
nominal current	A	5,3	8,3	4,75	0,73	1,1
nominal power	W	95	150	150	95	150
operation acc. to VDE 0530				S1		
protection acc. to VDE 0530				IP 54		
connection				light plastic-sheathed cable		
rotating direction				reversible		
design				B 14		
mechanical data:						
mass moment of inertia	kgm ²	0,567	0,477	0,477	0,567	0,477
nominal torque	Nm	3,1	3,8	3,8	3	3,8
starting torque	Nm	0,59	0,59	0,59	0,59	0,59
max. continuous torque at stall	Nm	5,2	6,2	5,2	5,5	5,1
speed regulation constant	N ⁻¹ cm ⁻¹ rpm	10,8	12,9	10,8	11,6	10,8
mechanical time constant	ms	0,06	0,08	0,08	0,07	0,08
friction torque	Nm					
rotor weight	kg			0,85		
motor weight	kg			2,8		
motor weight incl. parking brake	kg			3,9		
ball bearings				6201/6200		
F _r (allowable radial shaft load)				140		
F _A (allowable axial shaft load)				56		
electrical data:						
armature resistance	Ω	0,7	0,24	0,7	43	13
armature inductance	mH	2,2	0,7	2,2	133	43
terminal resistance	Ω	0,75	0,29	0,75	45	14
voltage constant	V/1000 rpm	12,34	7,02	12,34	93	53,4
torque constant	Nm/A	0,118	0,067	0,118	0,88	0,51
starting current	A	30	74	50	3,9	12
max. peak current ¹⁾	A	37	65	37	4,9	8,4
electrical time constant	ms	2,9	2,4	2,9	3	3,1
thermal data:						
max. ambient temperature	°C			40		
insulation class acc. to VDE 0530				F		
thermal time constant	min			40		
temperature-rise without cooling	K/W	3	2,2	2,2	3	2,4
parking brake B 4:						
nominal voltage	V			24		
nominal current	A			0,14		
static break torque (motor shaft)	Nm			1		
max. number of operations per hour				2000		
Tolerances acc. to standard VDE 0530. ± 10 % is valid for not VDE mentioned tolerances.						
The values mentioned in the table are valid for supply with DC voltage with allowable harmonic content up to 5%. For undulatory current with increased harmonic content the rated motor values must be multiplied by 0,7.						
¹⁾ The values are valid for operation in temperature-ranges from 0 up to 40°C and it is not allowed to exceed them, even not for a short-time, to avoid magnet-weakening.						
● Motors also available with DC tachogenerator and/or incremental encoder.						
● Motors also available with device plug DIN 43650.						
Motor design: Brushed 2-pole DC motor with permanent magnet field. Brush holder opening will be accessible by removing the cover plate. Flange mounting with 4 threads (see drawing).						
Rotating direction: The rotating direction can be changed by inverting the connections.						
1. Order example Motor GNM 5440E 24 V, 1600 rpm, 95 W						
2. Order example Motor GNM 5440E 42 V, 3000 rpm, 150 W - parking brake - B 4 - 24 V						
Special designs on request.						